

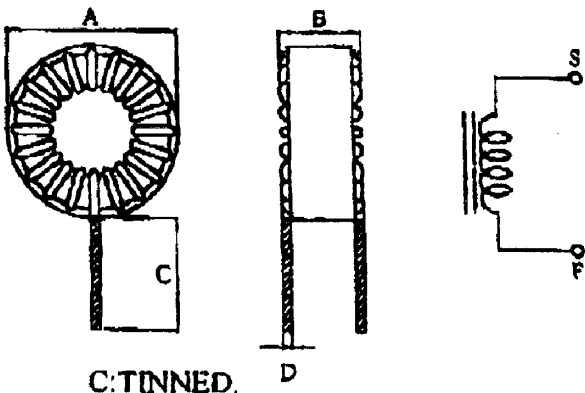
Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

CUST. NAME	N0037	DATE	JUN.06,02'
DESCRIPTION	Toroidal Coil Inductors	TYPE	
GS PART NO.	GSTCV6852A-275uH	DWG. NO.	015504
CUST. PART NO.	542-5704	CUST. DWG. NO.	

DIM	Unit in mm	MECHANICAL MEASUREMENTS
A	22.22(max)	Jameco Part Number 208282  C: TINNED.
B	11.09(max)	
C	15.0+1.0	
D	0.7+0.05	
E		
F		
G		
H		
I		
J		
K		
L		
M		
N		

ELECTRICAL MEASUREMENTS & TEST EQUIPMENT						Remark :
NO.	L (uH) @1KHz/0.25V	L (uH) +IDC @1KHz/0.25V	SRF(min) MHz	RDC(max) (Ω)	IDC(max) (A)	CT39(OR EQUI.) CORE: T68-52A WIRE: 0.7 φ 2UEW NY TURN: 70Ts(IN,REF.) 耐熱膠布: 6mmx140mm. ※ VARNISH.
EQU.	CH-101	CH-101 CH 1320	HM 9460	HP34401A	CH 1320	
SPE.	275±20%	150.0(min)		0.095	2.0	
1	275.4	168.9		0.078		
2	272.7	168.9		0.077		
3	274.9	169.0		0.076		
4	273.8	169.0		0.078		
5	275.0	168.9		0.077	▼	
6						
7						
8						
9						
10						

DRAW BY: [Signature] 6/02' CHECKED BY: [Signature] 6/02' APPROVED BY: [Signature] 6/02'